

SERIES: T21



Dial: 2, 2½", 3", 4", 5", 6"

DESCRIPTION

Indumart T21 Series All Stainless Steel Bimetal Thermometers meet stringent demands and can be used in industrial applications, where particular importance is attached to good measuring accuracy, reproducibility and long-term stability. These thermometers are suitable for harsh environment, as well as aggressive media applications.

SPECIFICATIONS

- Accuracy** 1.5%
- Dial Sizes** 2½" (63 mm), 3" (80 mm), 4" (100 mm), 5" (125 mm), 6" (160 mm)
- Case & Stem** 304 stainless steel
- Connection** Back or Bottom, ½" NPT,
- Stem Diameter** 6 mm (std.); 8 & 10 mm
- Stem Length** 63...500 mm
- Window** Glass
- Zero Adjustment** External screw or pointer adjustment
- Max. Operating Press.** 2500 kPa (360 psi)
- Max. Process Temp.** 600°C / 1100°F

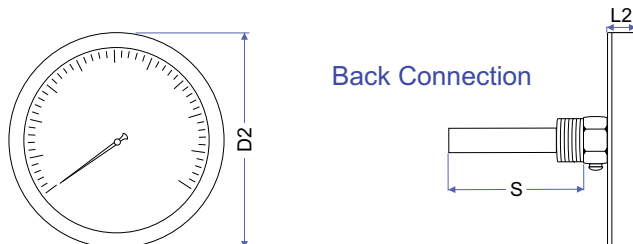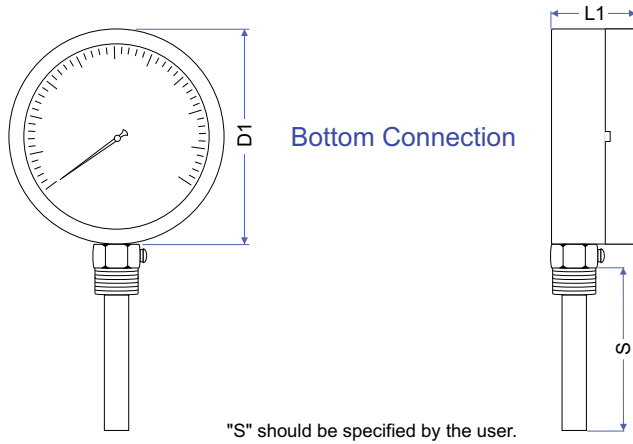

ORDER CODES

Model T21 - - -

CONNECTION TYPE

- Back K
- Bottom T

DIAL SIZE

- 50 mm (2") 1
- 63 mm (2½") 2
- 80 mm (3") 3
- 100 mm (4") 4
- 125 mm (5") 5
- 160 mm (6") 6

STEM DIAMETER

- 6.0 mm (Standard) 0
- 8.0 mm 2
- 10 mm 3

OPTIONS

- BSP Thread TB

*Please specify the stem length at the end of the selected model.
Example: T21T4-0-TB (63 mm stem)*

	DIMENSIONS (mm)					
	Ø50 mm	Ø63 mm	Ø80 mm	Ø100 mm	Ø125 mm	Ø160 mm
D1	55	65	84	112	131	166
D2	53	62	80	106	125	160
L1	10	13	15	17	18	19
L2	41	44	47	48	49	50

"S" or "L" should be specified by the user.
Specifications may change without prior notice.